


General Purpose Ultrasound Phantom

Model 054GS

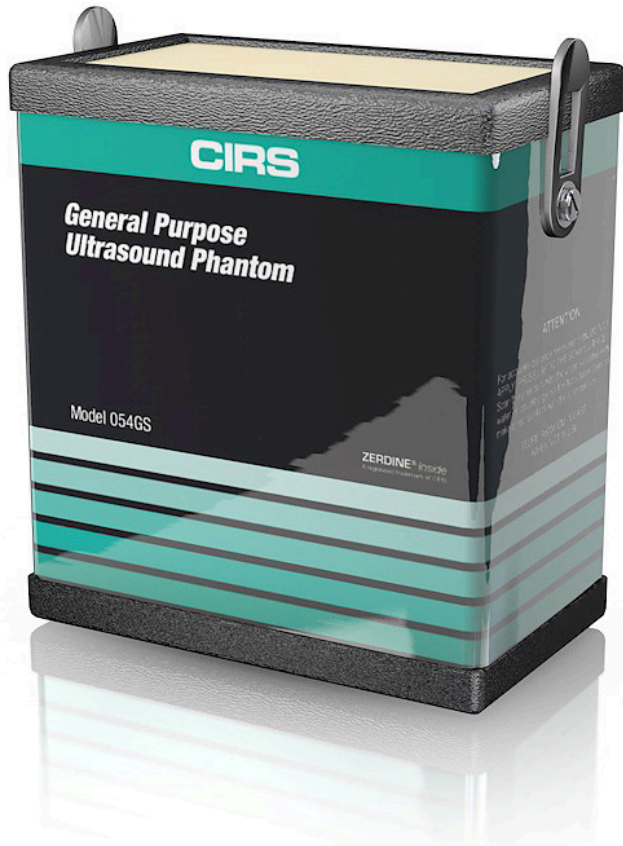

Exceed ACR Accreditation Requirements

- Detachable water wells allow for testing curvilinear and endocavity probes
- Ensure over ten years of reliable use through reinspection and repair services

Includes best in industry four-year warranty

ZERDINE® Inside
A registered trademark of CIRS

The CIRS Model 054GS General Purpose Ultrasound Phantom contains gray scale targets and improved sensitivity targets that exceed the phantom requirements outlined in the ACR accreditation program.

The phantom is made of CIRS' proprietary Zerdine® hydrogel polymer, which has been formulated to provide tissue mimicking properties including compatibility with harmonic imaging. To maximize phantom lifetime, this gel is contained in a rugged ABS plastic housing with a Saran-based laminate membrane.


CIRS ultrasound QA phantoms come standard with a robust housing, rugged carry case, 48-month warranty and user's guide.

Key Tests with Model 054GS

- Uniformity
- Depth of Penetration
- Beam Profile/ Focal Zone/ Lateral Response Width
- Vertical Distance Measurement
- Horizontal Distance Measurement
- Axial and Lateral Resolution
- Elevational Resolution
- Contrast Resolution
- Grayscale Contrast Sensitivity
- Dead Zone Assessment

CIRS

900 Asbury Ave • Norfolk, Virginia 23513 • USA • Tel: 757-855-2765 • WWW.CIRSSINC.COM

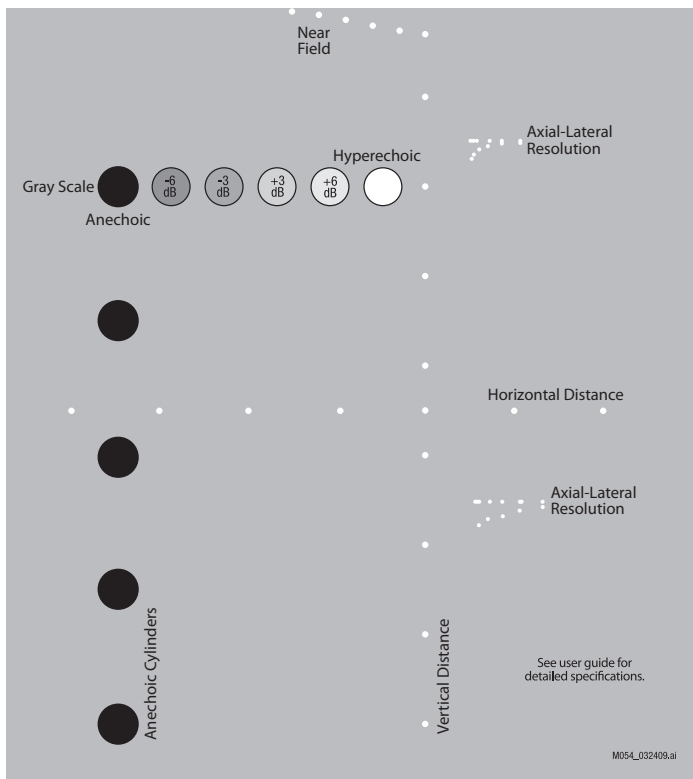

Phantom includes detachable scanning wells and air tight case.

SPECIFICATIONS

DIMENSIONS:	17.8 cm x 12.7 cm x 20.3 cm (7" x 5" x 8")
PHANTOM WEIGHT:	11 lbs. (4.1 kg)
HOUSING MATERIALS:	ABS Plastic
MEMBRANE	Saran-based laminate
TISSUE-MIMICKING MATERIAL	Zerdine® solid elastic hydrogel

ZERDINE® PROPERTIES

Freezing point: 0° C
 Melting point: Above 100° C
 Speed of Sound: 1540 m/s
 Other: Compatible with harmonic imaging

VERTICAL DISTANCE GROUP

Number of targets: 10
 Wire diameter: 100-micron, nylon monofilament
 Depth range: 1 to 18 cm
 Spacing: 20 mm

HORIZONTAL DISTANCE GROUP

Number of groups: 7
 Wire: 100-micron, nylon monofilament
 Depth: 9 cm
 Spacing: 20 mm respectively

NEAR FIELD GROUP

Number of targets: 6
 Wire Diameter: 100 microns, nylon monofilament
 Depth range: 1 to 6 mm
 Distance b/w Targets: 1 mm

MODEL 054GS INCLUDES

QTY	COMPONENT DESCRIPTION
1	General Purpose Ultrasound Phantom
1	Detachable Protective Cover
1	Detachable Water Well (1 cm deep)
1	Detachable Endocavity Well
1	Carry Case
-	48-Month Warranty
-	User Guide
-	Certificate of Compliance

AXIAL-LATERAL RESOLUTION GROUPS

Wire diameter: 80 microns

Group 1&2 Depths: 3 cm
 Axial separation: 4, 3, 2, 1, 0.5 & 0.25 mm
 Lateral separation: 4, 3, 2, 1, 0.5 & 0.25 mm

Group 3 Depths: 11 cm
 Axial separation: 5, 4, 3, 2 & 1 mm
 Lateral separation: 5, 4, 3, 2 & 1 mm

ANECHOIC STEPPED CYLINDERS

Number of targets: 12
 Diameter of targets: 1.3, 2.0, 3.0, 4.5, 6.7 & 10.0 mm
 Depth of Targets: 1.5, 4.5, 7.0, 10.0, 13.0, 16.0 cm
 Contrast: Anechoic, Cyst-like, 1 mm

GRAY SCALE TARGETS

Group 1: 3 cm deep, Ø 8 mm
 Contrast: -9, -6, -3, +3, +6 & > +15 dB with respect to background
 Group 2: 11.5 cm deep, Ø 10 mm
 Contrast: -6, -3, +3, +6 & > +15 dB with respect to background

