Multi-Purpose & Endoscopic Phantom

Model ATS 570




The Model 570 Multipurpose & Endoscopic phantom is an easy, comprehensive means of evaluating imaging systems over the full range of clinical imaging frequencies (2 MHz to 18 MHz). The phantom is designed with a combination of monofilament line targets for distance measurements and tissue mimicking target structures of varying sizes and contrasts. Due to the acoustic similarity of the background material and the target structures, artifacts caused by distortion, shadowing and enhancement have been eliminated. Four gray scale targets ranging in contrast from +6 to -3 dB are provided to evaluate the system's displayed dynamic range and gray scale processing performance.

The Model 570 offers a new and improved scan surface design to easily accommodate linear, sector, endoscopic probes and mechanical sector probes such as used for rectal scanning. All ATS urethane phantoms are guaranteed for the useful life of the phantom, defined as 10 years.

Key Tests with Model ATS 570

- Uniformity
- Depth of Penetration
- Beam Profile/ Focal Zone/ Lateral Response
 Width
- Vertical Measurement Calibration
- Horizontal Measurement Calibration Linear (C1&C2)
- Axial and Lateral Resolution
- Horizontal Measurement Calibration Sector
- Contrast Resolution
- Grayscale Contrast Sensitivity
- Dead Zone Assessment



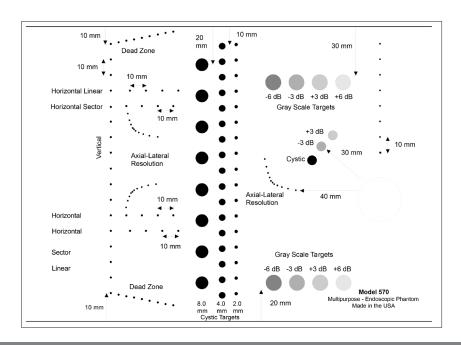

SPECIFICATIONS

DIMENSIONS	27 x 21.5 x 9.6 cm (11" x 8" x 4")
PHANTOM WEIGHT	10 lbs. (4.55 kg)
HOUSING MATERIALS	PVC
SCAN SURFACES	2
SCAN WELLS	1 cm
TISSUE-MIMICKING MATERIAL	Urethane Rubber

URETHANE PROPERTIES

Freezing point: < -40°C Above 100° C Melting point:

Speed of Sound: 1450 m/s at 23° Attenuation Coefficient: 0.5 dB/cm/MHz (measured at 3.5 MHz)

LINE TARGETS

Material: Monofilament nylon Diamter:

0.12 mm

VERTICAL DISTANCE GROUP

Number of targets: B1: 17

B2: 8

B1: 10-160 mm Depth range: B2: 10-80 mm

Spacing: B1: 10 mm

B2: 10 mm

HORIZONTAL DISTANCE GROUP

Number of groups: 5 & 5 cm Number of Targets: 10 2 cm Spacing:

DEAD ZONE GROUP

Number of targets: Depth range: 2.0 - 10.0 mm Spacing:

AXIAL-LATERAL RESOLUTION GROUPS

Number of targets: Lateral Displacement: 1 mm

5.0, 4.0, 3.0, 2.0, 1.0 mm 7.0, 11.0, 4.0, 16.0 cm Spacing: Depth:

MODEL ATS 570 INCLUDES

COMPONENT DESCRIPTION	
Multi-Purpose & Endoscopic Phantom	
10-Year Warranty	
User Guide	
Certificate of Compliance	

CONTRAST TARGETS (CYSTS)

Type: Non-echogenic, cylindrical

8 mm targets, Qty 8; spaced at 2 cm intervals 4 mm targets, Qty 17; spaced at 1 cm intervals 2 mm targets, Qty 17; spaced at 1 cm intervals Column 1: Column 2: Column 3:

GRAY SCALE TARGETS

Type: Number of Sets: Echogenic, Cylindrical

Set 1:

Number of Targets:

Contrast Levels: +6, +3, -3, -6 dB Diameter: 10 mm

Depth from Top

30 mm Scan Surface:

Set 2:

Number of Targets: Contrast Levels:

+6, +3, -3, -6 dB

Diameter: Depth from Bottom

20 mm Scan Surface:

Set 3: Number of Targets: Contrast Levels: -+3, -3 dB Diameter: 6 mm

Distance from **Endocavity Opening:** 30 mm

